

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup>:</b> A62B 18/08, B63C 11/26, G10K 11/22	<b>A1</b>	<b>(11) International Publication Number:</b> WO 97/37724 <b>(43) International Publication Date:</b> 16 October 1997 (16.10.97)
<b>(21) International Application Number:</b> PCT/AU97/00216 <b>(22) International Filing Date:</b> 3 April 1997 (03.04.97)  <b>(30) Priority Data:</b> PN 9155 4 April 1996 (04.04.96) AU  <b>(71) Applicant (for all designated States except US):</b> SAFETY EQUIPMENT AUSTRALIA PTY. LTD. [AU/AU]; North Shore Business Park, 35/1 Jubilee Avenue, Warriewood, NSW 2102 (AU).  <b>(72) Inventors; and</b> <b>(75) Inventors/Applicants (for US only):</b> JERVMO, Bengt, Yngve, Roland [SE/AU]; 40 James Sea Drive, Green Point, NSW 2251 (AU). KLOCKSETH, Martinus, Oliver [SE/AU]; 90 Ashburn Avenue, Belrose, NSW 2085 (AU). BERNDTSON, Goran, Bertil, Claes [AU/AU]; 19 Care Free Road, Elanora Heights, NSW 2101 (AU).  <b>(74) Agent:</b> F. B RICE & CO.; 28A Montague Street, Balmain, NSW 2041 (AU).		<b>(81) Designated States:</b> AU, CA, JP, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i>
<b>(54) Title:</b> A COMMUNICATION INTERFACE FOR BREATHING EQUIPMENT		
<b>(57) Abstract</b>		
<p>This invention concerns all types of breathing equipment, ranging from simple passive systems where air is drawn through a filter in a face-mask by the wearer's breathing action, to sophisticated powered systems which supply clean air at a regulated positive pressure. In all cases, because some form of face-mask or hood must be worn communication by the wearer is severely restricted. The invention provides breathing protection equipment including acoustic coupling to a remotely located microphone. The microphone may, for example, be contained together with its electrical supply and a transmitter in the wearer's breast pocket, and be connected with the face mask of the breathing protection equipment by means of a flexible sound pipe. These arrangements place the microphone, and all other electrical parts remotely from the mask. Among other things this facilitates regular cleaning of the mask, and may improve the reliability of the system generally.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## A COMMUNICATION INTERFACE FOR BREATHING EQUIPMENT

### Technical Field

This invention concerns all types of breathing protection and diving equipment, ranging from simple passive systems where air is drawn through  
5 a filter in a face-mask by the wearer's breathing action, to sophisticated powered systems which supply clean air at a regulated positive pressure. In all cases, because some form of face-mask or hood must be worn, communication by the wearer is severely restricted.

### Background

10 To address the problems of communication while wearing a breathing protection mask, electrical connectors and microphones have been introduced into the masks.

### Disclosure of the Invention

The invention provides breathing equipment including a face part  
15 that in use is adjacent at least the mouth of the wearer, the face part being associated with acoustic coupling to a remotely located microphone. The breathing equipment may be used for breathing protection or diving applications.

The microphone may, for example, be contained together with its  
20 electrical supply and a transmitter in the wearer's breast pocket, and be connected with the face mask of the breathing protection equipment by means of a flexible sound pipe. These arrangements place the microphone, and all other electrical parts remotely from the mask. Among other things this facilitates regular cleaning of the mask, and may improve the reliability  
25 of the system generally.

The acoustic coupling may comprise a sound pipe which may be made of simple flexible tubing, such as tubing made from plastics materials.

A face mask may act as a pressure box and the upper end of the  
30 sound pipe can be positioned within the mask cavity. The sound pipe may enter the cavity through a port fabricated in the mask, or through the air supply valving.

Alternatively, the sound pipe may have a flared end to funnel the sound pressure waves caused by speech into the pipe.

A membrane may be provided over the upper end of the sound pipe  
35 to prevent moisture or other material from entering it.

At the lower end the sound pipe may be sealed into a package which also contains the microphone, to provide good transfer of the sound pressure to the microphone. The seal is preferably pneumatic, but if there were a small hole the system will still function. The pressure transmission medium  
5 in the pipe may be gaseous or liquid.

The cut off frequency for an acoustic coupling pipe is proportional to its diameter, and the medium in the pipe. A tube of 50mm diameter in air will have a cut off frequency of approximately 3KHz, which is just sufficient for the transfer of intelligible speech. An important advantage of the  
10 invention arises from having the speaker and the remote microphone both located in essentially the same pressure chamber. The pressure chamber is split into two compartments which are connected together by the acoustic coupling. The acoustic coupling may provide either an hydraulic or  
15 pneumatic link to maintain the two compartments at the same pressure, and this enables a pipe of small diameter to be utilised for the acoustic coupling. Specifically the diameter of the pipe may be less than that expected to be required by consideration of the diameter and the medium, because of the equal pressures at either end.

In order to cancel ambient noise, two microphones may be connected  
20 in a noise cancelling arrangement. The first microphone may pick up the noise plus the speech signals, and the second microphone may be arranged to pick up only the noise signals. An electronic circuit will subtract the two signals in order to provide a clean speech signal.

#### Brief Description of the Drawings:

25 An example of the invention will now be described with reference to:  
Figure 1 which is a schematic illustration of an embodiment of the invention; and

Figure 2 which is a circuit diagram showing electrical treatment of the sound signals picked up by the embodiment of Figure 1.

#### Disclosure of the Best Modes of the Invention

30 Referring first to Figure 1 the breathing protection equipment 1 comprises a face mask 2 with some kind of air supply port 3. A sound pipe 4, comprising clear PVC having an inner diameter of 1.5mm, penetrates the mask and terminates in a flared funnel 5 within the mask cavity 6. A membrane 7  
35 covers the open end of the funnel 5.

At the lower end, sound pipe 4 is pneumatically sealed in a cavity 8 together with a microphone 9, by means of an adaptor 10. By this means the sound pressure change inside the sealed breathing mask cavity 6 are pneumatically communicated to the sealed cavity 8 and microphone 9 via the air in the sound pipe 4.

A second microphone (not shown) is also associated with the lower end of the sound pipe, however, this microphone only picks up ambient noise and does not receive any of the sound communicated by sound pipe 4. Referring now to Figure 2, the speech and noise signal 11 from microphone 8 is fed to the non-inverting input of an amplifier 12, and the noise signal 13 picked up by the second microphone is fed to the inverting input of amplifier 12. Amplifier 12 subtracts the noise signal from the speech and noise signal to output a clean speech signal 14.

Although the invention has been described with reference to a particular example, it should be appreciated that it may be embodied in many other forms. In particular it should be appreciated that the invention is not restricted to breathing protection equipment of the type which involves use of a face mask, and it may be applied to those systems where there is no mask cavity, such as hoods or visors. In those situations the flare at the upper end of the sound pipe is adapted to provide a sound pick up (or collection) cavity. When a mask is used the flare may be dispensed with, since the mask cavity will act as a sound collector.

It should also be appreciated that the invention will operate with sound pipes of diameters with a broad range of inner diameters less than about 50mm. Inner diameters of between 1 and 5mm have been found to operate well. The sound pipe could also be used for air supply in which case a wider diameter could be used.

It will be appreciated by persons skilled in the art that numerous variations and/or modifications may be made to the invention as shown in the specific embodiments without departing from the spirit or scope of the invention as broadly described. The present embodiments are, therefore, to be considered in all respects as illustrative and not restrictive.

## CLAIMS:

1. Breathing equipment including a face part that, in use is adjacent at least the mouth of a wearer, the face part being associated with acoustic coupling means which provide acoustic coupling to a remotely located  
5 microphone.
2. Breathing equipment according to claim 1, wherein the breathing equipment is breathing protection equipment.
3. Breathing equipment according to claim 1, wherein the breathing equipment is breathing diving equipment.
- 10 4. Breathing equipment according to claims 1, 2 or 3, wherein the equipment comprises a mask, visor or hood.
5. Breathing equipment according to my preceding claim, wherein the acoustic coupling means comprises a sound pipe.
6. Breathing equipment according to claim 5, wherein the sound pipe is  
15 made of flexible tubing.
7. Breathing equipment according to claim 6, wherein the remote end of the sound pipe enters a compartment which also contains the microphone.
8. Breathing equipment according to claim 7, wherein the compartment together with the face part comprise a single pressure chamber.
- 20 9. Breathing equipment according to claim 5, wherein there is a gaseous or liquid pressure transmission medium in the sound pipe.
10. Breathing equipment according to claim 1, wherein the local end of the acoustic coupling, which is associated with the face part, terminates in a sound collector.
- 25 11. Breathing equipment according to claim 10, wherein a membrane is provided over the upper end of the sound pipe.
12. Breathing equipment according to claim 10, wherein the sound collector is a flared upper end of the sound pipe.
13. Breathing equipment according to claim 10, wherein the sound  
30 collector is a mouth covering mask.
14. Breathing equipment according to claim 13, wherein the sound pipe enters the mask through a port.
15. Breathing equipment according to claim 13, wherein the sound pipe enters the mask through inhalation or exhalation valving.
- 35 16. Breathing equipment according to any preceding claim, wherein two microphones are connected in a noise cancelling arrangement.

17. Breathing equipment according to claim 16, wherein a first microphone picks up noise plus speech signals, and a second microphone is arranged to pick up only the noise signals; an electronic circuit subtracts the two signals in order to provide a clean speech signal.


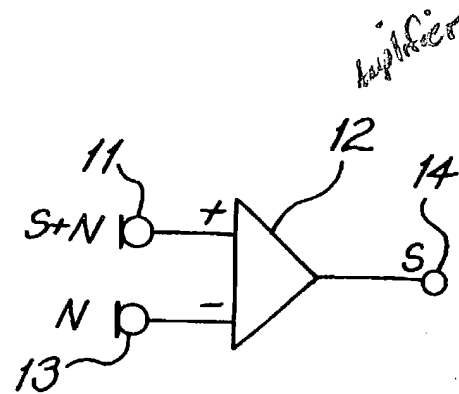


FIG. 2

FIG. 1

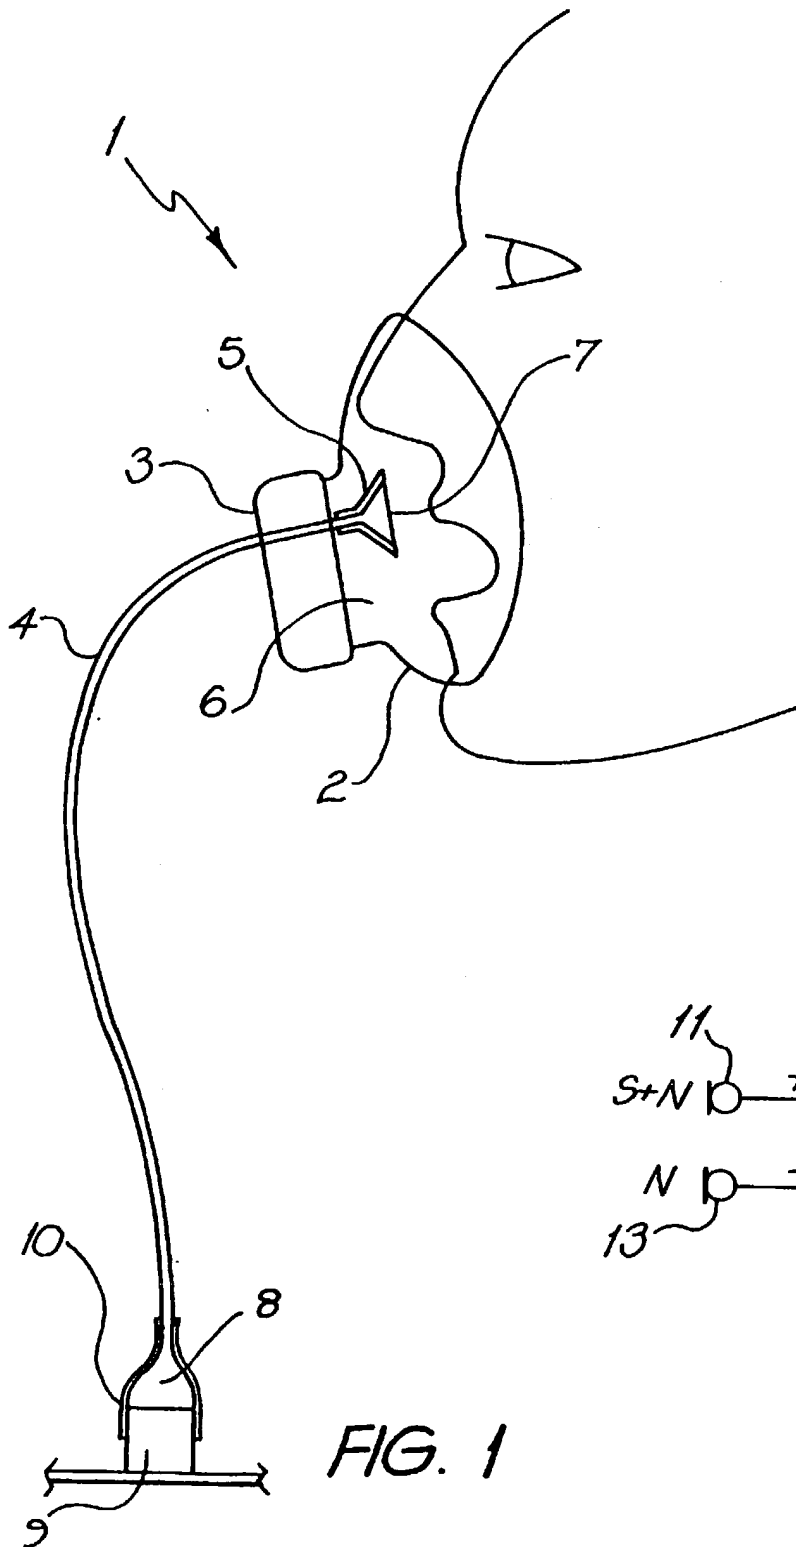

# INTERNATIONAL SEARCH REPORT

International Application No.

PCT/AU 97/00216

## A. CLASSIFICATION OF SUBJECT MATTER

Int Cl<sup>6</sup>: A62B 18/08, B63C 11/26, G10K 11/22

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
AU: IPC, A62B 18/08, B63C 11/26, A61M 16/06, A42B 3/28, 3/30, G10K 11/12, G10K 11/22

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
DERWENT, JAPIO; (Mask or Visor or Hood or Breath:) and (microphone) and (coupl: or pipe or tube)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US, 4537276 A (CONFER) 27 August 1985 Abstract	1-17
X	US, 3184556 A (LARKIN) 18 May 1965 entire specification	1-17
X	GB 2084428 A (GENTEX CORPORATION) 7 April 1982 Abstract, page 2 lines 45-51, page 3 lines 56-70	1-4, 10, 13, 16, 17

☒ Further documents are listed in the continuation of Box C

☒ See patent family annex

<p>* Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>		<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&amp;" document member of the same patent family</p>
--	--	---

Date of the actual completion of the international search  
19 May 1997

Date of mailing of the international search report

23 MAY 1997

Name and mailing address of the ISA/AU  
AUSTRALIAN INDUSTRIAL PROPERTY ORGANISATION  
PO BOX 200  
WODEN ACT 2606  
AUSTRALIA Facsimile No.: (06) 285 3929

Authorized officer

I.A. BARRETT

Telephone No.: (06) 283 2189

# INTERNATIONAL SEARCH REPORT

International Application No.

PCT/AU 97/00216

C (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO, 94/05372 A (BRETAGNE RADIO COMMUNICATIONS) 17 March 1994 Abstract, page 3 line 7, page 4 line 3	1-17
X	WO, 91/12051 A1 (HOK INSTRUMENT AB) 22 August 1991 Abstract, page 2	1, 2, 4-10, 12-17
X	WO, 91/07859 A1 (ACTRON MANUFACTURING COMPANY) 30 May 1991 Abstract, page 9-11	1-17
X	WO, 82/03160 A1 (CHAISE, Francois) 30 September 1982 Abstract	1, 4-17
X	FR, 828843 A (DECOMBE) 31 May 1938 entire specification	1-17
A	US, 4013992 A (DEWBERRY et al) 22 March 1977 Abstract	
A	GB, 2058578 A (The Secretary of State for Defence) 15 April 1981 Abstract	
A	EP, 377316 A2 (NOETZEL) 11 July 1990 Abstract	

### Information on patent family members

**PCT/AU 97/00216**

Patent Document Cited in Search Report				Patent Family Member			
GB	2084428	DE	3137113	FR	2490431	IT	1138220
		US	4374301				
WO	9405372	FR	2695039				
WO	9112051	AU	72472/91	EP	534975	SE	9000552
		SE	466188	US	5195528		
WO	9107859	EP	452486	JP	4504346	US	5138666
		US	5371804	US	4901356		
WO	8203160	AU	82054/82	EP	74969	FR	2502372
		FR	2510793				
EP	377316	CA	2005351	US	4980926	ZA	8909661